

EXTERIOR

Outdoor collection



2022



CristalRecord
Iluminación - Lighting

OUTDOOR LIGHTING

Iluminación exterior

TAN NECESARIA COMO LA LUZ DEL SOL

AS NECESSARY AS A DAYLIGHT

Para mejorar la experiencia en el hogar desde CristalRecord te queremos presentar nuestra colección de iluminación exterior aportando soluciones reales y así disfrutar de esas veladas nocturnas con unas luminarias decorativas, prácticas y funcionales.

To enhance the experience at home from CristalRecord we want to present our outdoor lighting collection providing real solutions and in this way enjoy those nights with decorative, practical and functional luminaires.

Síguenos



CUBE SMART

Aplique para exterior e interior
Outdoor and indoor wall lamp



Exterior/ Outdoor



Wi-Fi
2.4GHz



IP54
Waterproof

Alto Confort



No Flicker




10W 700Lm

3000K 4000K 6000K



RGB

Ángulo de luz ajustable:
Adjustable light angle



Funciona con:



Compatible con:



Hz
50/60

CRI ≥80

PF: 0,5

ON/OFF x25.000

⌚ 30.000h

110-240 V




Ta: -20°C Tc: 45°C

LED **COB**

■ Antracita / Anthracite

43-540-10-777



100x100x100 mm


Aluminio y Cristal / Aluminium and glass.

CUBE PLUS

Aplique para exterior e interior
Outdoor and indoor wall lamp





Exterior/ Outdoor

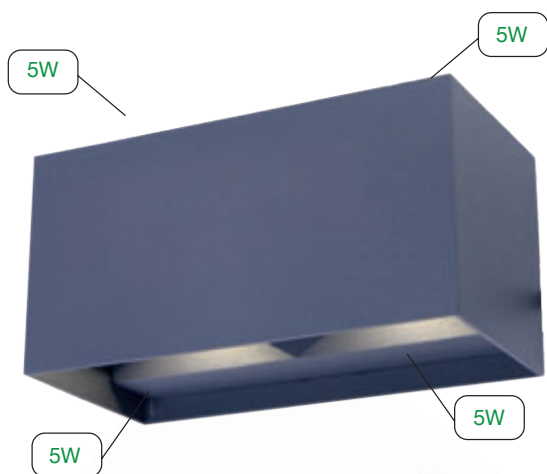

20W 1400Lm

Ángulo de luz ajustable:
Adjustable light angle

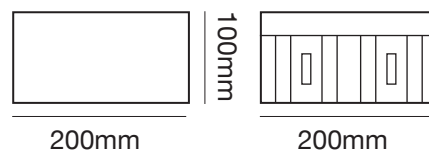


□ Blanco Mate / White matt

43-840-20-100 ◦ 4.000°K

■ Antracita / Anthracite

43-840-20-182 ◦ 4.000°K

Aluminio y Cristal / Aluminium and glass.



CUBE


Aplique para exterior e interior
Outdoor and indoor wall lamp



10W 700Lm

Ángulo de luz ajustable:
Adjustable light angle

5W



5W

□ Blanco Mate / White matt

43-530-10-300 ● 3.000°K

43-540-10-400 ○ 4.000°K


■ Antracita / Anthracite

43-530-10-382 ● 3.000°K

43-540-10-482 ○ 4.000°K

■ Marrón óxido / Oxide-brown

43-540-10-263 ○ 4.000°K



100x100x100 mm



Hz
50/60

CRI ≥80

PF: 0,5

ON/OFF x25.000

⌚ 30.000h

110-240 V



Ta: -20°C Tc: 45°C

LED COB

Aluminio y Cristal / Aluminium and glass.




Aplique para exterior e interior
Outdoor and indoor wall lamp




12W 1078Lm

◦4.000°K

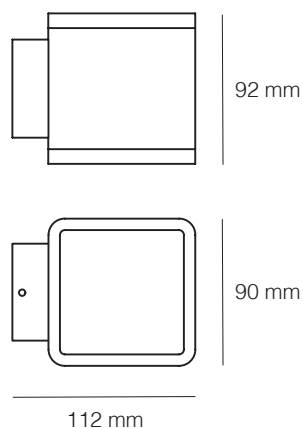

43-454-06-400



Aluminio y cristal / Aluminium and glass.

□ Blanco mate / Matt white.


CIPRI

Aplique para exterior e interior
Outdoor and indoor wall lamp





12W 850Lm

◦ 4.000°K



180°
LED orientable
Adjustable LED

43-206-12-482

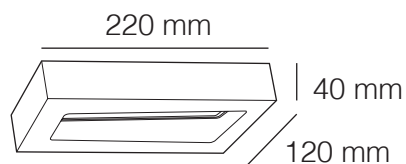

Aluminio y cristal / Aluminium and glass.


■ Antracita / Anthracite

SUN

Aplique para exterior
Outdoor bulkhead light




43-149-06-481




8W 585Lm

◦4.000°K

Sensor de luz y movimiento.
Light and motion sensor.



ON/ OFF Sensor



Aluminio y acrílico / Aluminium and acrylic.

■ Antracita / Anthracite



Aplicue para exterior e interior
Outdoor and indoor wall lamp



43-151-06-481



6W 480Lm

◦ 4.000°K



43-351-06-481

Ø 90mm



Aluminio y plástico / Aluminium and plastic.

■ Antracita / Anthracite

URPI


Aplique para exterior e interior
Outdoor and indoor wall lamp




6W 360Lm

◦ 4.000°K

LED orientable
Adjustable LED

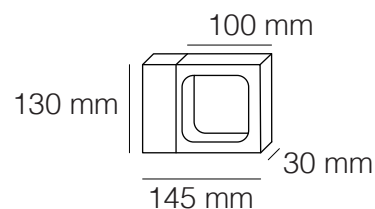

43-924-06-400



Aluminio y Cristal / *Aluminium and glass.*
■ Negro Mate / *Matt black*




Aplique para exterior e interior
Outdoor and indoor wall lamp



6W 360Lm


◦4.000°K

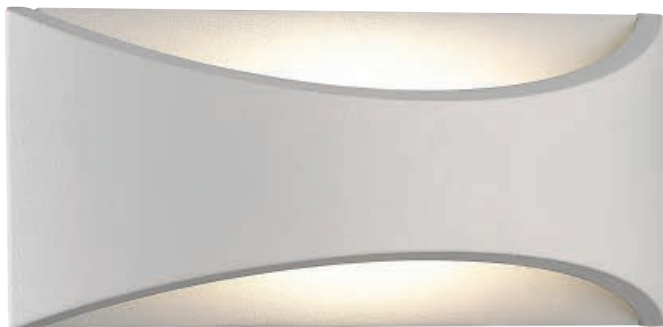

43-705-06-400



220 mm



IP 54 120° Hz 50/60 CRI ≥80 PF: 0,5

ON/OFF x25.000 ⚡ 30.000h 220-240 V

IK 05 Ta: -20°C Tc: 50°C LED **COB**

Aluminio y Cristal / Aluminium and glass.

□ Blanco Mate / Matt white

MINI

Aplique para exterior
Outdoor wall lamp




x1 E27

Max. 60W



No incluida/
Not included



■ Antracita / Anthracite

43-000-27-181


■ Marrón óxido / Oxide brown

43-000-27-263



Aluminio y PC / Aluminium and PC

MOTA

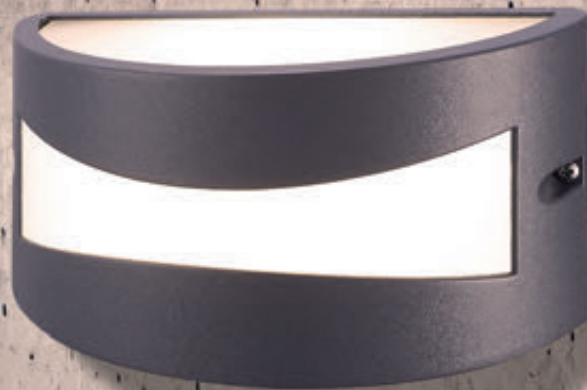

Aplique para exterior
Outdoor wall lamp



Exterior/ Outdoor




x1 E27

Max. 60W



No incluida/
Not included



■ Antracita / Anthracite

43-070-27-181

■ Marrón óxido / Oxide brown

43-070-27-263



Aluminio y PC / Aluminium and PC



Aplique para exterior e interior
Outdoor and indoor wall lamp






Exterior/ Outdoor



x1 GU10


Max. 35W

43-651-01-100

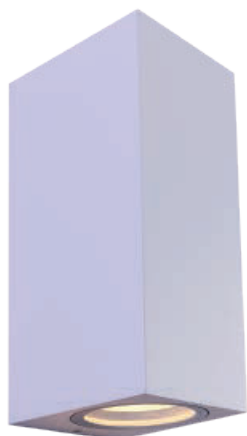

x2 GU10

43-652-02-100



Aluminio / *Die-casting aluminium*

□ Blanco Mate / *Matt white*

RELAX


Aplique para exterior e interior
Outdoor and indoor wall lamp



x1 GU10


Max. 60W

43-441-01-180



x2 GU10

43-442-02-180



Aluminio / Die-casting aluminium .
■ Antracita / Anthracite

RUTE

Aplique para exterior
Outdoor wall lamp



43-250-27-180

x1 E27

Max. 60W




No incluida/
Not included

Combínalo con nuestras
Bombillas Vintage:



Combine it with our
vintage bulbs



Metal / Metal

■ Negro mate / Matt black



Aplique y farol colgante para exterior

Outdoor sconce lantern and
Outdoor hanging lantern



Exterior/ Outdoor

IP44



Waterproof



93-022-27-180



43-022-27-180

x1 E27

Max. 60W




No incluida/
Not included

Combínalo con nuestras
Bombillas Vintage:



Combine it with our
vintage bulbs

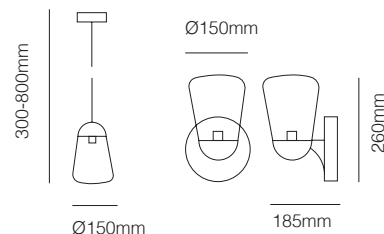

IP
44



IK
08

Aluminio y Cristal / *Aluminium and Glass.*

■ Negro mate / *Matt black*



Aplique y farol colgante para exterior

Outdoor sconce lantern and
Outdoor hanging lantern



93-260-27-180

43-260-27-180

x1 E27

Max. 60W




No incluida/
Not included

Combínalo con nuestras
Bombillas Vintage:



Combine it with our
vintage bulbs

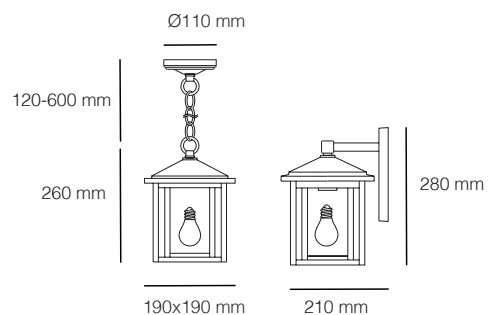

Metal / Metal

■ Negro mate / Matt black



Aplique y baliza de exterior

Outdoor LED wall lamp and
Outdoor LED bollard light



Exterior/ Outdoor



8W 719Lm

◦ 4.000°K


90°
LED orientable
Adjustable LED



07-201-05-481



43-201-08-481

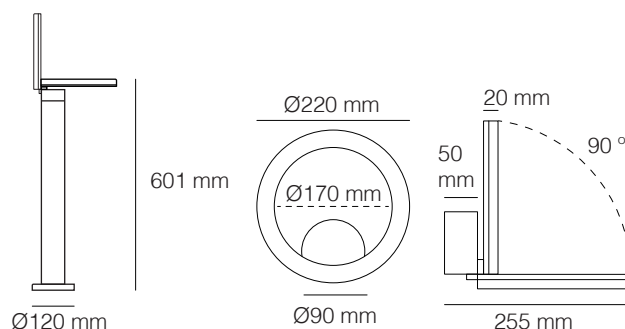

IP 54 120° Hz 50/60 CRI ≥80 PF: 0,5

ON/OFF x12.000 ⚡ 25.000h 220-240 V

IK 08 Ta: -20°C Tc: 50°C LED SMD

Aluminio y plástico / Aluminium and plastic.

■ Antracita / Anthracite



Baliza y sobre muro de exterior

Outdoor LED Pedestal and
Outdoor LED bollard light



Exterior/ Outdoor




08-206-06-482

7W 250Lm

◦ 4.000°K

ON/OFF x10.000 ⌚ 20.000h

PF: 0.5



PF: 0,5



07-406-10-482

10W 400Lm

◦ 4.000°K

ON/OFF x10.000 ⌚ 20.000h

PF: 0.91



Aluminio y plástico / Aluminium and plastic.

■ Antracita / Anthracite



Baliza LED de exterior.
Outdoor LED bollard light.



Exterior/ Outdoor



9W 350Lm

◦ 4.000°K

07-373-09-481

108x108 mm



300 mm

07-573-09-481

108x108 mm



500 mm



CRI ≥80 PF: 0,5



220-240 V



Ta: -20°C Tc: 50°C

LED COB

Aluminio y acrílico / Aluminium and acrylic.

■ Antracita / Anthracite

PUT

Aplique + baliza para exterior

Outdoor wall lamp and
Outdoor LED Spike ligh




07-113-12-481

12W 870Lm




◦ 4.000°K

Dos instalaciones

Two ways of installation



Conector IP65 incluido
IP 65 connector included
+
0,5 m. cable

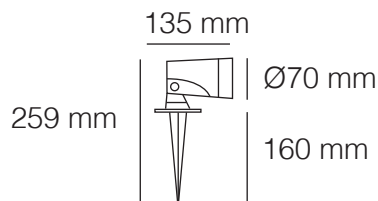

Aluminio y cristal / Aluminium and glass.

■ Antracita / Anthracite

PIM



Luz de escalera para exterior e interior
Indoor and outdoor stair light



Exterior/ Outdoor



Alto Confort




No Flicker



43-772-03-400

2,4W 90 Lm

◦ 4.000°K



Hz
50/60

CRI ≥80

PF: 0,5

ON/OFF x25.000

⌚ 30.000h

110-240 V



Ta: -20°C Tc: 45°C


LED **COB**

■ Acero / Steel.

Acero y Cristal / Steel and Glass.

SONER

Downlight empotrable para exterior e interior
Outdoor and indoor Recessed LED Downlight

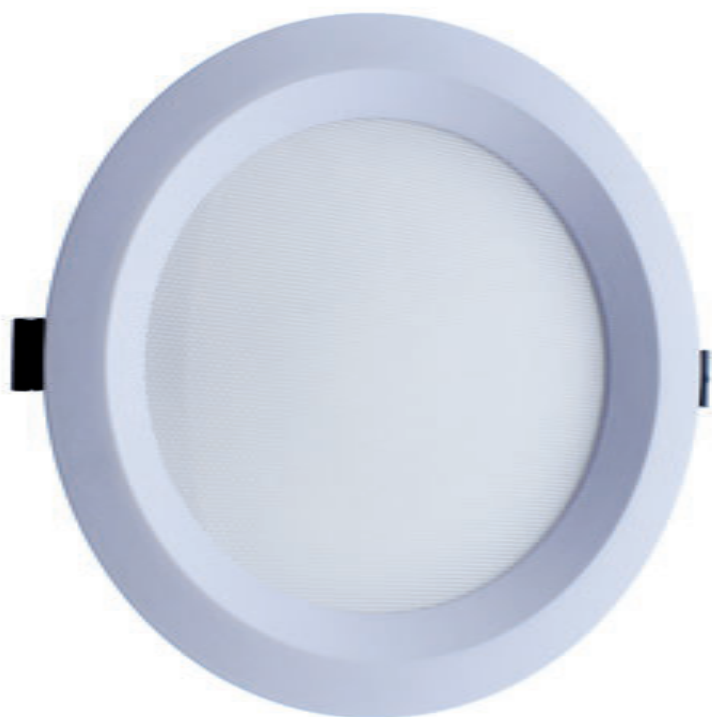

15W 1730Lm

• 3.000°K
○ 4.000°K
• 5.500°K

02-415-15-400 ⌀110 mm ⌀135 mm

02-515-15-400 ⌀145 mm ⌀175 mm

20W 2260Lm

• 3.000°K
○ 4.000°K
• 5.500°K

02-615-20-400 ⌀150 mm ⌀185 mm

02-815-20-400 ⌀195 mm ⌀240 mm

30W 3370Lm

• 3.000°K
○ 4.000°K
• 5.500°K

02-815-30-400 ⌀195 mm ⌀240 mm

IP 44 120° Hz 50/60 CRI ≥80 PF: 0.9

ON/OFF x15.000 ⚡ 36.000h 220-240 V

☀ Ta: -20°C Tc: 50°C LED SMD

Aluminio y PMMA / Aluminium and PMMA

☐ Blanco Mate / Matt white

TANGO

Downlight empotrable para exterior e interior
Outdoor and indoor Recessed LED Downlight



9W 900Lm

Ø75 mm Ø89 x 27mm

- 3.000°K 02-671-09-300
- 4.000°K 02-671-09-400
- 6.000°K 02-671-09-600

36W 1730Lm

Ø210 mm Ø225 x 27mm

- 3.000°K 02-671-36-300
- 4.000°K 02-671-36-400
- 6.000°K 02-671-36-600

IP 54 180° Hz 50/60 CRI ≥80 PF: 0.5

ON/OFF x20.000 ⚡ 30.000h 220-240 V

IK 06 Ta: -20°C Tc: 50°C LED **SMD 2835**

Aluminio y PC / *Aluminium and PC*

□ Blanco Mate / *Matt white*



Downlight exterior de superficie
Outdoor surface mounted Downlights



18W 1440Lm


o 4.000°K



□ 02-354-18-401
■ 02-354-18-182



□ 02-654-18-401
■ 02-654-18-182



30W 2450Lm


o 4.000°K



□ 02-354-30-401
■ 02-354-30-182



□ 02-654-30-401
■ 02-654-30-182



IP 54 □ 120° Hz 50/60 CRI ≥80 PF: 0.5
ON/OFF x20.000 ⚡ 30.000h 220-240 V
IK 06 ☀ Ta: -20°C Tc: 55°C LED SMD 2835

Polycarbonato / Polycarbonate.

□ Blanco Texturizado / Sand-white
■ Antracita / Anthracite



Plafón para exterior e interior
Outdoor and indoor flush ceiling lamp



Exterior/ Outdoor

IP54



Waterproof

Alto Confort



No Flicker

Fácil instalación
Easy installation



12W

150 mm
220x220 mm



23-545-12-103
23-545-12-104
23-545-12-106

• 3.000K 1200Lm
◦ 4.000K 1300Lm
• 6.400K 1200Lm

23-845-12-103
23-845-12-104
23-845-12-106



18W

150 mm
280x280 mm



24-545-18-103
24-545-18-104
24-545-18-106

• 3.000K 1700Lm
◦ 4.000K 1800Lm
• 6.400K 1800Lm

24-845-18-103
24-845-18-104
24-845-18-106



24W

150 mm
330x330 mm



25-545-24-103
25-545-24-104
25-545-24-106

• 3.000K 2200Lm
◦ 4.000K 2500Lm
• 6.400K 2400Lm

25-845-24-103
25-845-24-104
25-845-24-106



CRI ≥80

PF: 0.5

ON/OFF x20.000 ⚡ 35.000h 220-240 V



Ta: -20°C Tc: 45°C

LED SMD

Polycarbonato / Polycarbonate.

□ Blanco Mate / Matt white

EVE

Downlight empotrable para exterior e interior
Outdoor and indoor Recessed LED Downlight



Exterior/ Outdoor



Baño/ Bathroom



01-735-06-000




01-735-06-180

7W 550Lm

◦ 4.000K

Ø 65 mm



IP 44 24° Hz 50/60 CRI ≥80 PF: 0.5

ON/OFF x10.000 15.000h 170-240 V

Ta: -20°C Tc: 65°C LED COB

Aluminio / Aluminium.

□ Blanco Mate / Matt White

■ Negro Mate / Matt Black

SOL

Downlight empotrable para exterior e interior
Outdoor and indoor Recessed LED Downlight



30W

2700Lm • 3.000°K


02-771-30-300 -Matt
02-771-30-301 -Inox UGR 19

2850Lm ◦ 4.000°K

02-771-30-000 -Matt
02-771-30-001 -Inox UGR 19

3000Lm • 5.700°K

02-771-30-570 -Matt
02-771-30-571 -Inox UGR19



IP 44 □ 90° Hz 50/60 CRI ≥80 PF: 0.9

ON/OFF x15.000 ⚡ 50.000h 220-240 V

☀ Ta: -20°C Tc: 50°C LED **SMD**

Aluminio y PC / Aluminium and PC

□ Blanco Mate / Matt white
○ Blanco-Inox / White-inox

ALHAMBRA

Empotrable de exterior e interior
Outdoor and indoor Recessed spotlight



x1 GU10

Max. 50W 100-250V




No incluida/
Not included



00-302-01-000



01-302-01-000



45mm

Ø85 mm



Aluminio / Cast aluminium .

□ Blanco / White

ALHAMBRA

Empotrable de exterior e interior
Outdoor and indoor Recessed spotlight



x1 GU10

Max. 50W 100-250V



No incluida/
Not included

Acabados Finishes

Níquel/ *Nickel*

Blanco/ *White*



01-402-01-888



AR-402-00-002



AR-402-00-000



84mm



AR-402-01-002



AR-402-01-000



83mm



Aluminio / *Cast aluminium* .



LUXEK

Proyector para exterior
LED Floodlight



Exterior/ Outdoor



77-102-10-181

10W 800Lm

• 6.400°K

 126x122,5 mm

77-102-20-181

20W 1600Lm

• 6.400°K

 161x156 mm

77-102-30-181

30W 2400Lm

• 6.400°K

 198x191 mm

IP 65   120° Hz 50/60 CRI ≥80 PF: 0.9

ON/OFF x15.000  25.000h 180-260 V

IK 07  Ta: -20°C Tc: 55°C LED SMD

Aluminio y Cristal templado /
Die cast aluminium and Tempered Glass

■ Antracita / Anthracite

Colección exterior

Outdoor collection

2 0 2 2



CristalRecord
Iluminación - Lighting

Pol. Ruiseñores I
Ctra. de Logroño, km. 8,5
50011 Zaragoza, Spain



+34 976 459 277

www.cristalrecord.com
orders@cristalrecord.com
pedidos@cristalrecord.com